



Professional Leak detector Soft-Foam



For compressed air and gas installations.

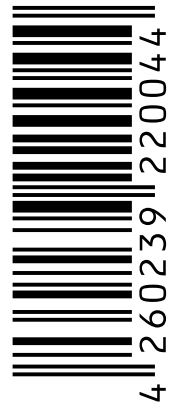

Thick foam with increased viscosity and a longer evaporation period. Allows precise detection of rusty and dirty components. Used by professionals.

- 360° valve – allows full depletion of the content
- Eco-friendly
- Long lasting foam allows the detection after single application
- Quality controlled by TÜV

Product characteristics

Scope of application: 0- 500C
Foam lasting period: about 3 minutes
Propellant: nitrogen
Solvents: none
Storability: 18 months

More information at www.v-lube.de

Use:

Shake the spray can well and spray the foam on the connection checked. In case of hard accessible spots spray some foam on the palm of hand place near the checked place. In case of leaks foam bubbles will appear. Every foam bubble stands for one leak. In case of very small leaks a longer observation period is advised.



Fact sheet English 2012 All of the afore mentioned facts are of informative character and have been prepared according to the best of knowledge and belief. We take no responsibility for the results and consequences resulting from use.